





Every Moment of Life



INDUSTRIAL

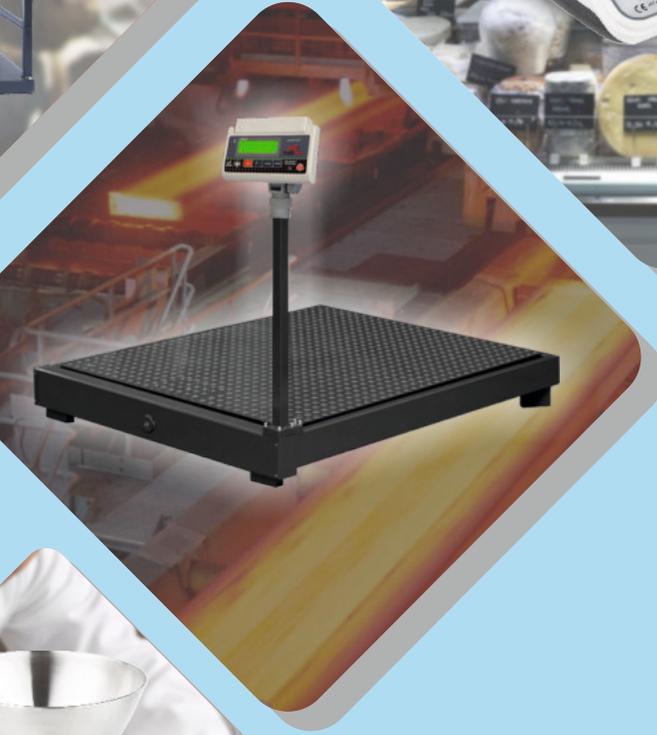

LABORATORY



RETAIL

WEIGHING SYSTEMS

www.turkter.com
+90 444 6 031



Every Moment of Life

OUR VISION

Coreks is a leader in electronical scale production and supply in Turkish market. We, TÜRKTER, are a company of 28 years and own more than %22 of this market. In addition, we export our own electronical scales to more than 10 countries. We are happy to provide qualified service to the customers from all over the world by using modern production and distribution techniques . We empower our production in our center in Eyüb Sultan with your help and the sincerity of our agents in the different cities of Turkey. "In every moment of life" is not just a company slogan. With our ideal products such as loadcell, trade and industrial besides competitive prices and post-sale technical and technological support, "In Every Moment Of Life" shows our love of productivity and technological power for the future.

35X40 TR

Static electricity-proof

Universal connector RS 232

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

TR
&
TR4

Capacity & Readability	30Kg /0,5gr	60Kg/1gr	100Kg /5gr	150Kg/10gr	200Kg /20gr	300Kg/50gr
Size	35x40 cm					
Operating Temperature	-10 C 45 C					
Loadcell	1 Unit					
Platform Feature	Static Painted Steel Platform					
Power Supply	110V/220V					
Balance	Adjustable Legs					

35X40 TR4

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



Counting Mode with Sampling Feature

Insect Shielded

Optional > Waterproof IP 67
> Universal connector RS 232

Every Moment of Life

40X50 TR



Static electricity-proof

Universal connector RS 232

Optional > Waterproof IP 67

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

TR
&
TR4

Capacity & Readability	60Kg /2gr	100Kg/10gr	150Kg /20gr	300Kg/50gr
Size	40x50 cm			
Operating Temperature	-10 C 45 C			
Loadcell	1 Adet			
Platform Feature	Static Painted Steel Platform			
Power Supply	110V/220V			
Balance	Adjustable Legs			

40X50 TR4

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



Large LCD Screen

Counting Mode with Sampling Feature

Insect Shielded

Optional > Waterproof IP 67
> Universal connector RS 232

Every Moment of Life

50X60 TR



Weight Hold Feature

Universal connector RS 232

Optional > Waterproof IP 67

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



TR & TR4

Capacity & Readability	150Kg /10gr	300Kg/50gr
Size	50x60 cm	
Operating Temperature	-10 C 45 C	
Loadcell	1 Unit	
Platform Feature	Static Painted Steel Platform	
Power Supply	110V/220V	
Balance	Adjustable Legs	

50X60 TR4

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

24-bit Processor

Large LCD Screen

Insect Shielded

Optional > Waterproof IP 67
> Universal connector RS 232



Every Moment of Life

60x70 TR

Weight Hold Feature

Universal connector RS 232

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

TR & TR4

Capacity & Readability	300Kg /50gr	500Kg/50gr	600Kg /100gr
Size	60x70 cm		
Operating Temperature	-10 C 45 C		
Loadcell	1 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		

60x70 TR4

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

24-bit Processor

Large LCD Screen

Insect Shielded

Optional > Waterproof IP 67
> Universal connector RS 232



Every Moment of Life

70x80 TR

Weight Hold Feature

Universal connector RS 232

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

TR & TR4

Capacity & Readability	300Kg /50gr	500Kg/50gr	600Kg /100gr
Size	70x80 cm		
Operating Temperature	-10 C 45 C		
Loadcell	1 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		



70x80 TR4

24-bit Processor

Large LCD Screen

Insect Shielded

Optional > Waterproof IP 67
> Universal connector RS 232

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



80x90 TR

Weight Hold Feature

Universal connector RS 232

Optional > Waterproof IP 67

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

TR
&
TR4

Capacity & Readability	300Kg /50gr	500Kg/50gr	600Kg /100gr
Size	80x90 cm		
Operating Temperature	-10 C 45 C		
Loadcell	1 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		

80x90 TR4

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

24-bit Processor

Large LCD Screen

Insect Shielded

Optional > Waterproof IP 67
> Universal connector RS 232



Every Moment of Life

FULL STAINLESS 35X40 TR



Static electricity-proof

Universal connector RS 232

Optional > Waterproof IP 67

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Digital warning system
- Insect shielded
- Static electricity-proof
- Internal rechargeable battery (200 hours)
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

TR
&
TR4

Capacity & Readability	30Kg /0,5gr	60Kg/1gr	100Kg /5gr	150Kg/10gr	200Kg /20gr	300Kg/50gr
Size	35x40 cm					
Operating Temperature	-10 C 45 C					
Loadcell	1 Unit					
Platform Feature	Full Stainless Platform					
Power Supply	110V/220V					
Balance	Adjustable Legs					

FULL STAINLESS 35X40 TR4

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



Counting Mode with Sampling Feature

Insect Shielded

Optional > Waterproof IP 67
> Universal connector RS 232

FULLSTAINLESS 40X50 TR

Static Electricity-proof

Universal Connector RS 232

Optional > Waterproof IP 67

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



TR
&
TR4

Capacity & Readability	60Kg /2gr	100Kg/10gr	150Kg /20gr	300Kg/50gr
Size	40x50 cm			
Operating Temperature	-10 C 45 C			
Loadcell	1 Unit			
Platform Feature	Full Stainless Platform			
Power Supply	110V/220V			
Balance	Adjustable Legs			

FULLSTAINLESS 40X50 TR4

Insect Shielded

Counting Mode with Sampling

M+ Feature

Optional > Waterproof IP 67
> Universal connector
RS 232

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



FULLSTAINLESS 50X60 TR

Universal connector RS 232

Weight Hold Feature

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



TR
&
TR4

Capacity & Readability	150Kg /10gr	300Kg/50gr
Size	50x60 cm	
Operating Temperature	-10 C 45 C	
Loadcell	1 Unit	
Platform Feature	Full Stainless Platform	
Power Supply	110V/220V	
Balance	Adjustable Legs	

FULLSTAINLESS 50X60 TR4

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

Counting Mode with Sampling

Internal rechargeable battery (200 hours)

M+ Feature

Optional > Waterproof IP 67

> Universal connector
RS 232



FULLSTAINLESS 60X70 TR

Universal connector RS 232

Weight Hold Feature

Optional > Waterproof IP 67



24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

TR
&
TR4

Capacity & Readability	300Kg / 50gr	500Kg / 50gr	600Kg / 100gr
Size	60x70 cm		
Operating Temperature	-10 C 45 C		
Loadcell	1 Unit		
Platform Feature	Full Stainless Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		

FULLSTAINLESS 60X70 TR4

Counting mode with sampling

Internal rechargeable battery (200 hours)

M+ Feature

Optional > Waterproof IP 67
> Universal connector RS 232



24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light


FULL STAINLESS 70X80 TR

24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Universal connector RS 232
 Adjustable high and low alarm limits
 weight hold feature
 Internal rechargeable battery (200 hours)
 Digital warning system
 Insect shielded
 Static electricity-proof
 Intelligent Sleep Mode
 360° lateral rotation, 90° vertical rotation
 ABS Plastic screen housing
 LED Screen automatic back light

Weight Hold Feature

Large LCD Screen

Optional > Waterproof IP 67

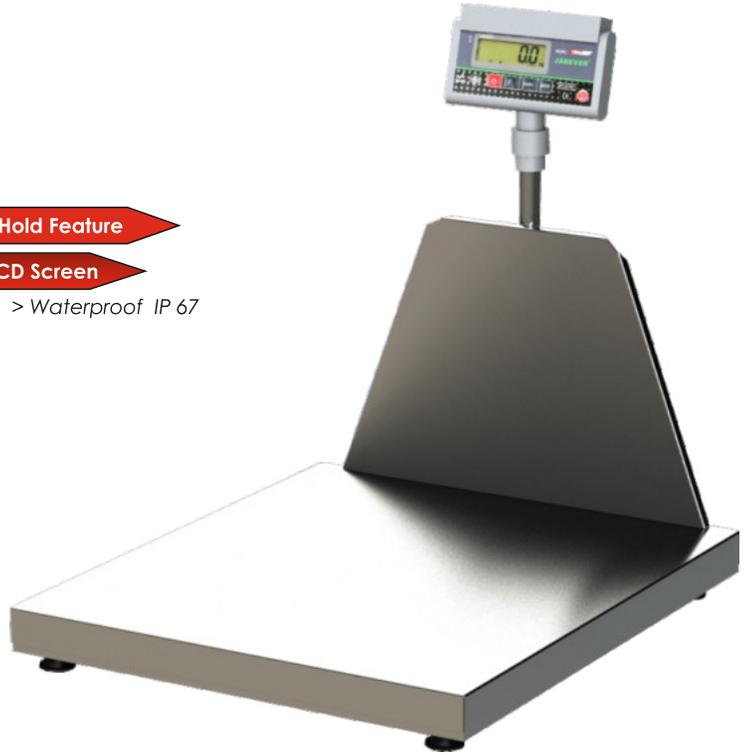

TR
&
TR4

Capacity & Readability	300Kg / 50gr	500Kg/50gr	600Kg / 100gr
Size	70x80 cm		
Operating Temperature	-10 C 45 C		
Loadcell	1 Unit		
Platform Feature	Full Stainless Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		


FULL STAINLESS 70X80 TR4

24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Universal connector RS 232 (optional)
 Memory+ Feature
 Adjustable high and low alarm limits
 Internal rechargeable battery (200 hours)
 Digital warning system
 Insect shielded
 Static electricity-proof
 Counting mode with sampling
 360° lateral rotation, 90° vertical rotation
 ABS Plastic screen housing
 LED Screen automatic back light

Static Electricity-proof

Internal rechargeable battery (200 hours)

Optional > Waterproof IP 67
 > Universal connector
 RS 232

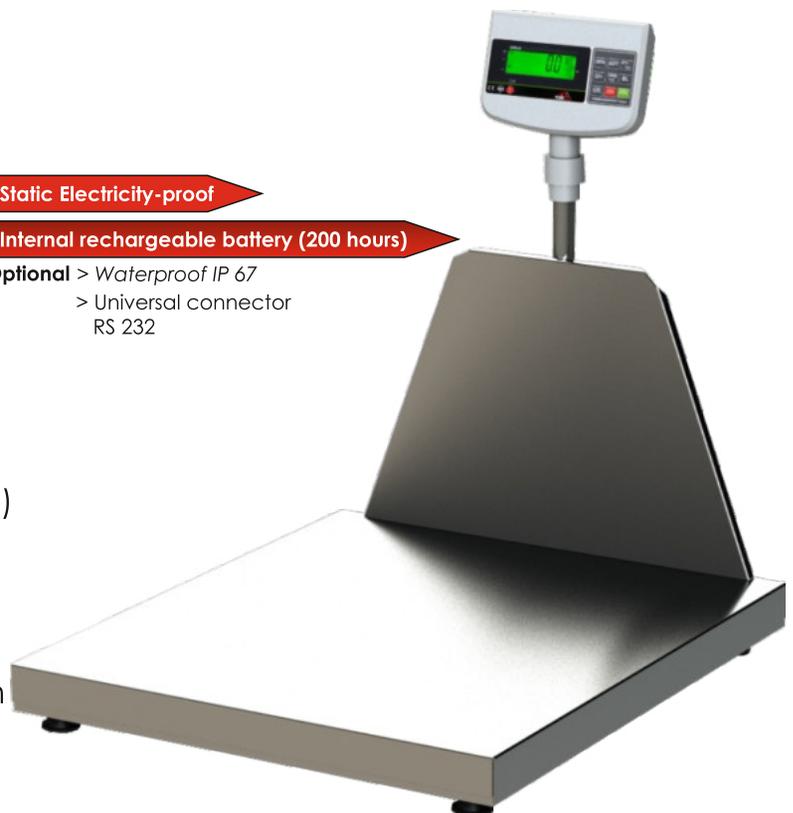


FULLSTAINLESS 80X90 TR

Static Electricity-proof

Weight Hold Feature

Large LCD Screen

Optional > Waterproof IP 67

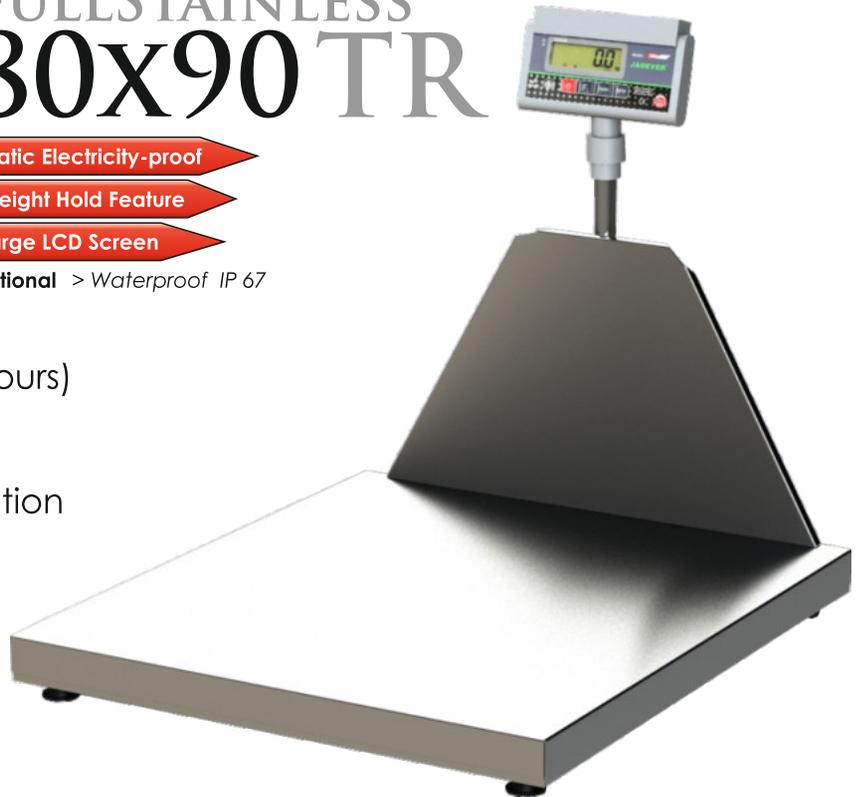

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- weight hold feature
- Digital warning system
- Insect shielded
- Internal rechargeable battery (200 hours)
- Adjustable high and low alarm limits
- Static electricity-proof
- 360° lateral rotation, 90° vertical rotation
- Intelligent Sleep Mode
- ABS Plastic screen housing
- LED Screen automatic back light

TR
&
TR4

Capacity & Readability	300Kg /50gr	500Kg/50gr	600Kg /100gr
Size	80x90 cm		
Operating Temperature	-10 C 45 C		
Loadcell	1 Unit		
Platform Feature	Full Stainless Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		

FULLSTAINLESS 80X90 TR4


Internal Rechargeable Battery (200 Hours)

M+ Feature

Counting Mode with Sampling

Optional > Waterproof IP 67
> Universal connector
RS 232

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- 360° lateral rotation, 90° vertical rotation
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- ABS Plastic screen housing
- LED Screen automatic back light

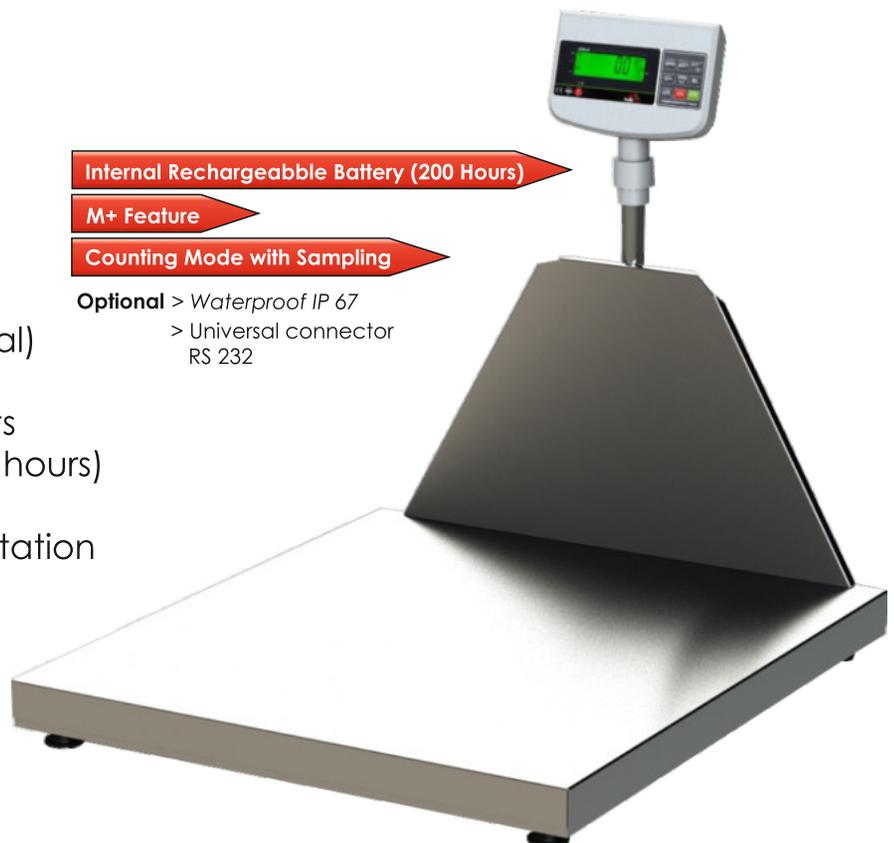

LONG LEGS 50X60 TR

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

Universal connector RS 232

Weight Hold Feature

Optional > Waterproof IP 67



TR
&
TR4

Capacity & Readability	150Kg / 10gr	300Kg / 50gr
Size	50x60 cm	
Operating Temperature	-10 C 45 C	
Loadcell	1 Unit	
Platform Feature	Static Painted Steel Platform	
Power Supply	110V/220V	
Balance	Adjustable Legs	

LONG LEGS 50X60 TR4

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

Counting Mode with Sampling

Internal rechargeable battery (200 hours)

M+ Feature

Optional > Waterproof IP 67
> Universal connector RS 232



LONG LEGS 60X70 TR

24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Universal connector RS 232
 Adjustable high and low alarm limits
 weight hold feature
 Internal rechargeable battery (200 hours)
 Digital warning system
 Insect shielded
 Static electricity-proof
 Intelligent Sleep Mode
 360° lateral rotation, 90° vertical rotation
 ABS Plastic screen housing
 LED Screen automatic back light

Universal connector RS 232

Weight Hold Feature

Optional > Waterproof IP 67



TR
&
TR4

Capacity & Readability	300Kg / 50gr	500Kg / 50gr	600Kg / 100gr
Size	60x70 cm		
Operating Temperature	-10 C 45 C		
Loadcell	1 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		

LONG LEGS 60X70 TR4

24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Universal connector RS 232 (optional) **Optional** > Waterproof IP 67
 Memory+ Feature
 Adjustable high and low alarm limits
 Internal rechargeable battery (200 hours)
 Digital warning system
 Insect shielded
 Static electricity-proof
 Counting mode with sampling
 360° lateral rotation, 90° vertical rotation
 ABS Plastic screen housing
 LED Screen automatic back light

Counting mode with sampling

Internal rechargeable battery (200 hours)

M+ Feature

> Universal connector
 RS 232



LONG LEGS 70X80 TR

24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Universal connector RS 232
 Adjustable high and low alarm limits
 weight hold feature
 Internal rechargeable battery (200 hours)
 Digital warning system
 Insect shielded
 Static electricity-proof
 Intelligent Sleep Mode
 360° lateral rotation, 90° vertical rotation
 ABS Plastic screen housing
 LED Screen automatic back light

- Weight Hold Feature
 - Large LCD Screen
 - 35 cm Long Legs
- Optional > Waterproof IP 67



TR
&
TR4

Capacity & Readability	300Kg /50gr	500Kg/50gr	600Kg /100gr
Size	70x80 cm		
Operating Temperature	-10 C 45 C		
Loadcell	1 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	35 cm Adjustable Legs		

LONG LEGS 70X80 TR4

24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Universal connector RS 232 (optional)
 Memory+ Feature
 Adjustable high and low alarm limits
 Internal rechargeable battery (200 hours)
 Digital warning system
 Insect shielded
 Static electricity-proof
 Counting mode with sampling
 360° lateral rotation, 90° vertical rotation
 ABS Plastic screen housing
 LED Screen automatic back light

- Static Electricity-proof
 - Internal rechargeable battery (200 hours)
 - ABS Plastic screen housing
- Optional > Waterproof IP 67
 > Universal connector RS 232



LONG LEGS 80X90 TR

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- weight hold feature
- Digital warning system
- Insect shielded
- Internal rechargeable battery (200 hours)
- Adjustable high and low alarm limits
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

Static Electricity-proof

Weight Hold Feature

Large LCD Screen

Optional > Waterproof IP 67



TR
&
TR4

Capacity & Readability	300Kg /50gr	500Kg/50gr	600Kg /100gr
Size	80x90 cm		
Operating Temperature	-10 C 45 C		
Loadcell	1 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		

LONG LEGS 80X90 TR4

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

Internal Rechargeable Battery (200 Hours)

M+ Feature

Counting Mode with Sampling

Optional > Waterproof IP 67
> Universal connector RS 232



Every Moment of Life

FOLDABLE SCALE TR



Modular Foldable Scale

Portable Design

Optional > Waterproof IP 67

24-bit processor

Waterproof IP 67 (optional)

Large LCD screen

Universal connector RS 232

Adjustable high and low alarm limits

weight hold feature

Internal rechargeable

battery (200 hours)

Digital warning system

Insect shielded

Static electricity-proof

Intelligent Sleep Mode

360° lateral rotation, 90° vertical rotation

ABS Plastic screen housing

LED Screen automatic back light

TR
&
TR4

Capacity & Readability	150Kg /20gr	300Kg/50gr
Size	One Platform 40x60cm / Dual Platform 80x60cm	
Operating Temperature	-10 C 45 C	
Loadcell	2 Unit	
Platform Feature	Static Painted Steel Platform	
Power Supply	110V/220V	
Balance	Adjustable Legs	
Additional feature	Registered Turkish Patent	

TURK
[PATENT]
REGISTERED

FOLDABLE SCALE

24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Digital warning system
 Insect shielded
 Memory+ Feature
 Static electricity-proof
 ABS Plastic screen housing
 Counting mode with sampling
 Universal connector RS 232 (optional)
 Adjustable high and low alarm limits
 Internal rechargeable battery (200 hours)
 360° lateral rotation, 90° vertical rotation
 LED Screen automatic back light



TR4

Foldable Feature

Portable Design

M+ Feature

Optional > Waterproof IP 67
> Universal connector RS 232



TR AHB - DORA MODULAR

TR4

Large LCD Screen

Digital Warning System

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

24-bit Processor

Static Electricity-proof

Adjustable high and low alarm limits

Optional > Waterproof IP 67
> Universal connector RS 232



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



3 Pieces Modular System

TR
&
TR4

Capacity & Readability	1500Kg / 500gr	
Size	100x200cm	100x220cm
Operating Temperature	-10 C 45 C	
Loadcell	8 Unit	
Platform Feature	Static Painted Steel Platform	
Power Supply	110V/220V	
Balance	Adjustable Legs	



TR AHB - BOZKURT

TR4

Universal Connector RS 232

Optional > Waterproof IP 67

Internal Rechargeable Battery (200 Hours)

Static electricity-proof

Optional > Waterproof IP 67
> Universal connector RS 232

Fixable Legs

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



TR
&
TR4

Capacity & Readability	600Kg /200gr	1500Kg/500gr	2000Kg/500gr
Size	80x100cm	80x100cm	80x150cm
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		

Every Moment of Life


AHB - GEZLER

TR

Easy Carry Feature

Universal Connector RS 232

Optional > Waterproof IP 67

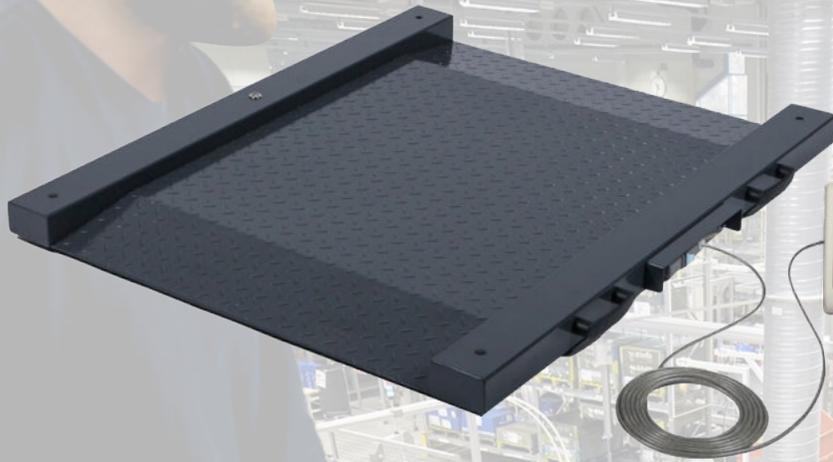

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

TR & TR4

Capacity & Readability	600Kg /200gr	1500Kg/500gr	2000Kg/500gr
Size	80x100cm	80x100cm	80x150cm
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		

TR4


Static electricity-proof

Insect Shielded

24-bit Processor

Optional > Waterproof IP 67

> Universal connector RS 232

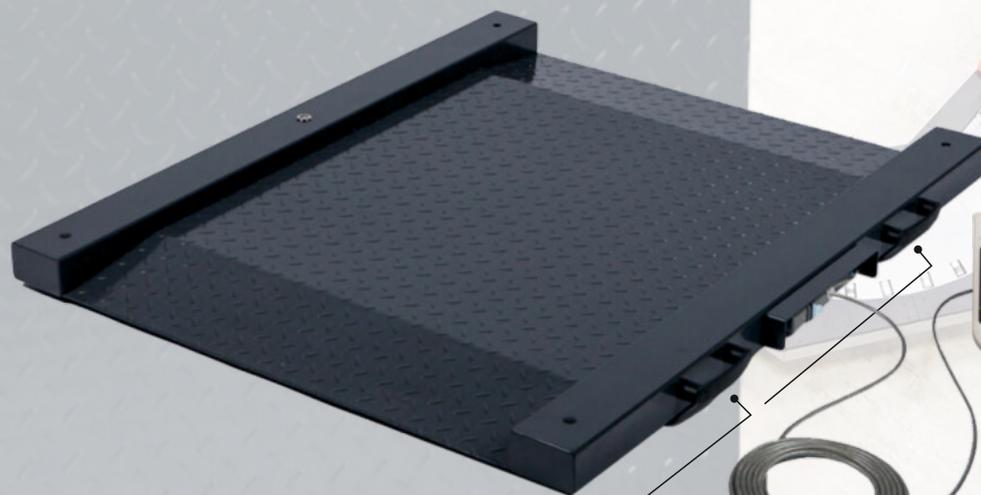

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

Easy Carry Handle



Every Moment of Life

AHB - İLMEN AHB-SB TR

Static Electricity-proof

Universal Connector RS 232

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

TR
&
TR4

Capacity & Readability	10.000 Kg/ 2.000 gr
Size	120x120 cm
Operating Temperature	-10 C 45 C
Loadcell	4 Unit
Platform Feature	Static Painted Steel Platform
Power Supply	110V/220V
Balance	Adjustable Legs

AHB - İLMEN AHB-SB TR

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

Digital Warning System

Insect Shielded

Optional > Waterproof IP 67
> Universal Connector
RS 232



TR

AHB - KABAR

TR4

Large LCD Screen

Digital warnin System

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

Adjustable High And Low Alarm Limits


Static Electricity-proof

24-Bit Processor

Optional > Waterproof IP 67
> Universal connector RS 232



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

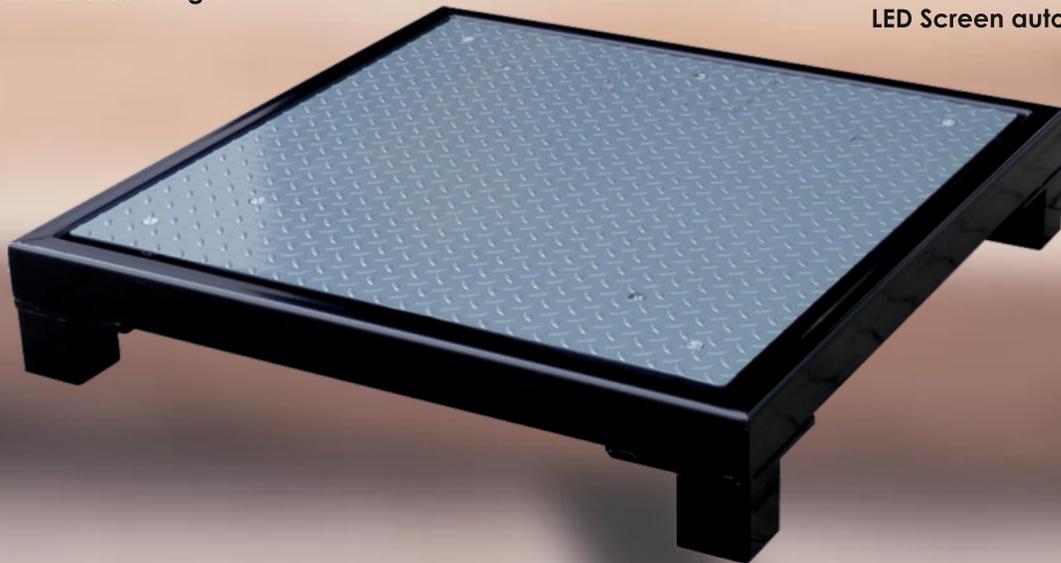

TR & TR4

Capacity & Readability	1500Kg /500gr
Size	120x120cm
Operating Temperature	-10 C 45 C
Loadcell	4 Unit
Platform Feature	Static Painted Steel Platform
Power Supply	110V/220V
Balance	Stable Legs



TR AHB - KARAV TR4


24-Bit Processor

Optional > Waterproof IP 67

Internal Rechargeable Battery (200 Hours)

Static electricity-proof

Optional > Waterproof IP 67
> Universal connector RS 232

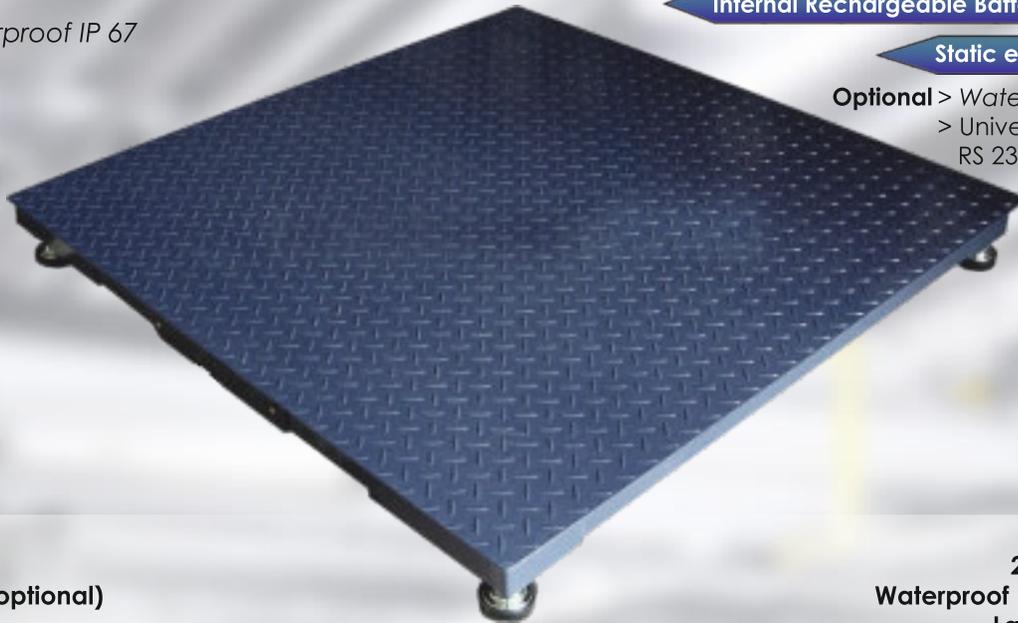

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



TR
&
TR4

Capacity & Readability	1500Kg /500gr	1500Kg/500gr	2000Kg/500gr
Size	100x120cm	120x120cm	120x150cm
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		



TR AHB - KAŞKA TR4 MODULAR

Insect Shielded

Static Electricity-proof

Optional > Waterproof IP 67


Internal rechargeable battery (200 hours)

Digital Warning System

24-bit Processor

Optional > Waterproof IP 67
> Universal connector
RS 232

Support Apparatus
(Optional)

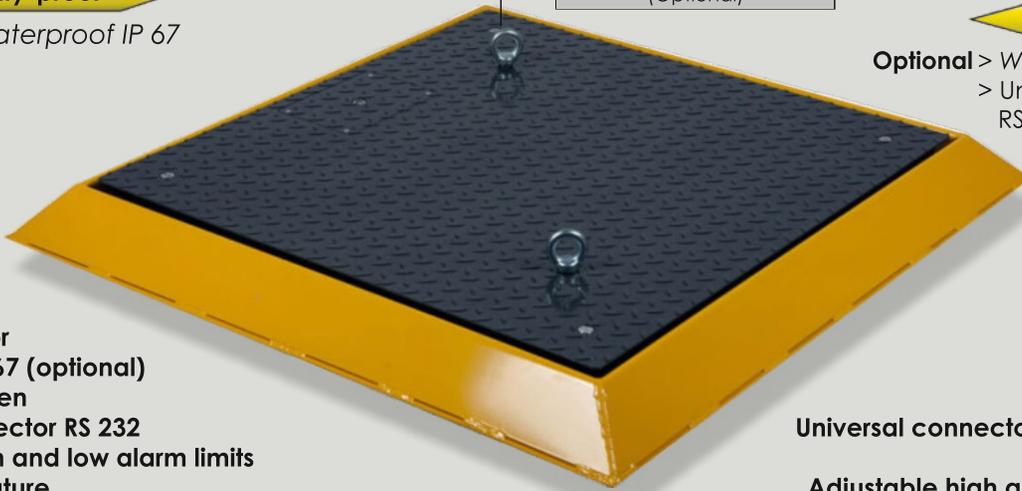

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

24-bit processor
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



TR
&
TR4

Capacity & Readability	8000Kg/4000gr
Size	80x120cm
Operating Temperature	-10 C 45 C
Loadcell	4 Unit
Platform Feature	Static Painted Steel Platform
Power Supply	110V/220V
Balance	Stable Legs



TR AHB - KARGI TR4

Large LCD Screen

Digital warnin System


Optional > Waterproof IP 67

Adjustable High And Low Alarm Limits

Static Electricity-proof


24-Bit Processor

Optional > Waterproof IP 67
> Universal connector RS 232

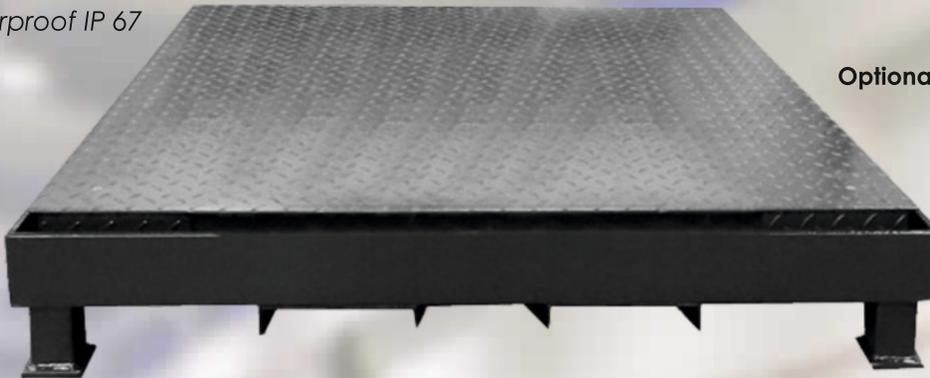

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

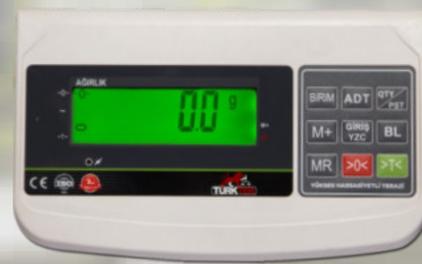

TR
&
TR4

Capacity & Readability	1500Kg /500gr	3000Kg/1000gr	6000Kg/2000gr
Size	120x120cm	120x150cm	150x150cm
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		



TR FULLSTAINLESS AHB - ARAT TR4

Insect Shielded

Static Electricity-proof

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

Adjustable High And Low Alarm Limits

Digital warnin System

24-Bit Processor

Optional > Waterproof IP 67
> Universal connector RS 232



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



**TR
&
TR4**

Capacity & Readability	1500Kg/500gr	2000Kg/500gr	3000Kg/500gr
Size	120x120cm	120x120cm	120x120cm
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Stainless Platform		
Power Supply	110V/220V		

Every Moment of Life

FULLSTAINLESS

AHB - ARTIM

TR

TR4

Large LCD Screen

Digital warning system

Optional > Waterproof IP 67

Adjustable high and low alarm limits

Static Electricity-proof

24-bit Processor

Optional

> Waterproof IP 67
> Universal connector RS 232



24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



TR & TR4

Capacity & Readability	600Kg / 200gr	1500Kg / 500gr	1500Kg / 500gr
Size	80X90cm	100X120cm	120x120cm
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Full Stainless Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		



TR

AHB - BALKAN FP

TR4

Large LCD Ekran

Digital warnin System

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

24-Bit Processor

Static Electricity-proof

Adjustable High And Low Alarm Limits

Optional > Waterproof IP 67
> Universal connector
RS 232



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



Locking Hinge System

TR & TR4



Capacity & Readability	2000Kg /500gr
Size	120x120cm
Operating Temperature	-10 C 45 C
Loadcell	4 Unit
Platform Feature	Full Stainless Platform
Power Supply	110V/220V
Balance	Adjustable Legs

TR

AHB - BALKIR STAINLESS

TR4

Static Electricity-proof


Universal connector RS 232

Optional > Waterproof IP 67

Digital Warning System

Large LCD Screen

Optional > Waterproof IP 67
> Universal connector RS 232

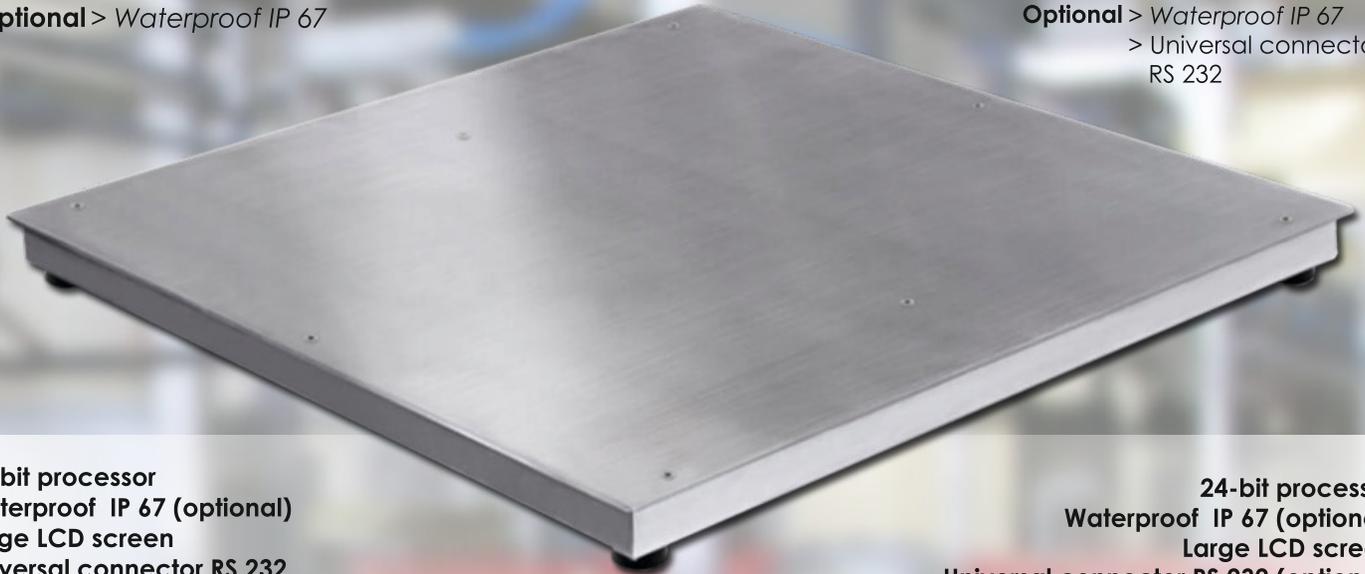

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



TR
&
TR4

Capacity & Readability	1500Kg/500gr	1500Kg/500gr	2000Kg/500gr
Size	100x120 cm	120x120 cm	120x150 cm
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Full Stainless Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		




AHB - BALKIN

TR

Static Electricity-proof

Universal Connector RS 232

Optional > Waterproof IP 67

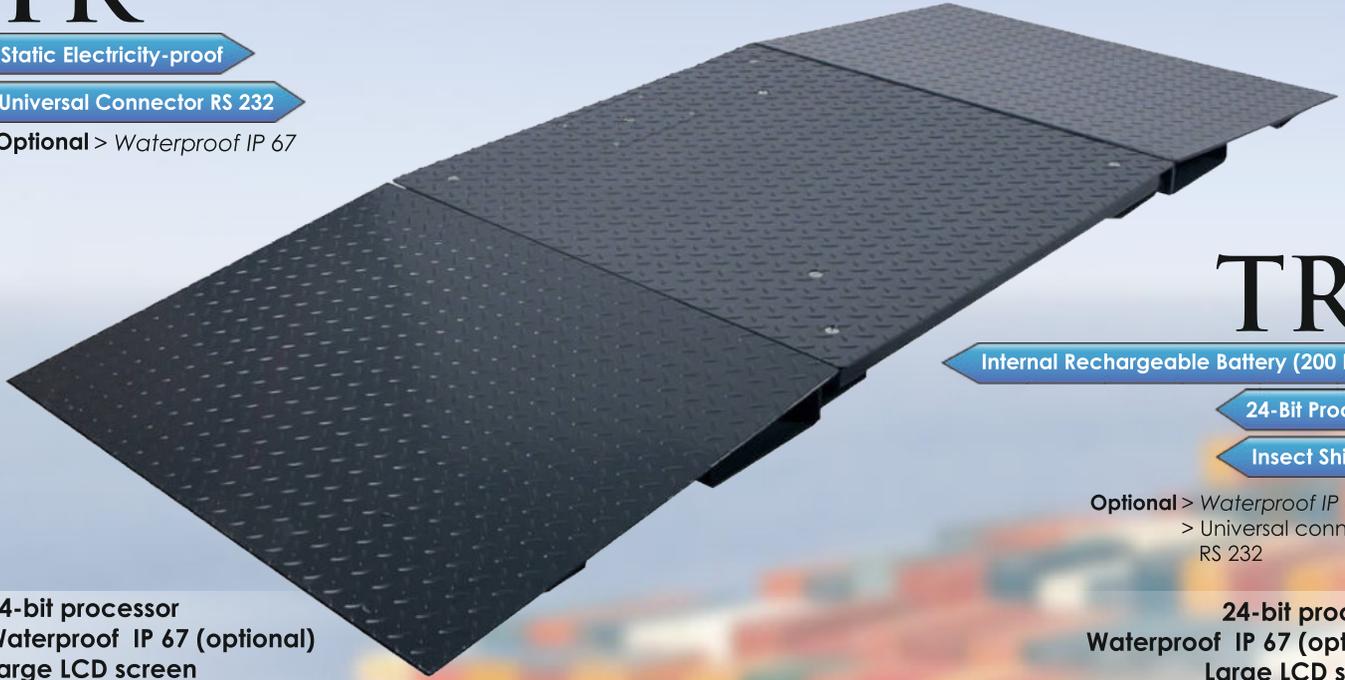

TR4

Internal Rechargeable Battery (200 Hours)


24-Bit Processor

Insect Shielded

Optional > Waterproof IP 67
> Universal connector RS 232

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

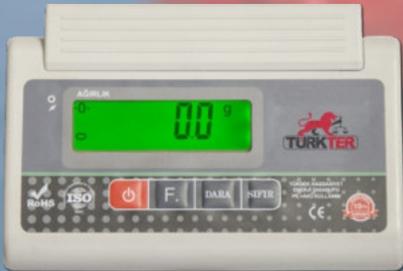

TR & TR4

Capacity & Readability	600Kg /200gr	1500Kg/500gr	2000Kg/500gr
Size	80x90cm	90x100cm	120x120cm
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		



MEDICAL SCALE

Every Moment of Life



- Internal rechargeable battery (200 hours)
- 360° lateral rotation, 90° vertical rotation
- Adjustable high and low alarm limits
- LED Screen automatic back light
- Waterproof IP 67 (optional)
- Universal connector RS 232
- ABS Plastic screen housing
- Intelligent Sleep Mode
- Digital warning system
- Static electricity-proof
- weight hold feature
- Large LCD screen
- 24-bit processor
- Insect shielded

TR

Optional > Waterproof IP 67

TR & TR4

Capacity & Readability	300kg / 100gr	600kg / 200gr
Size	90x120 cm	
Operating Temperature	-10 C 45 C	
Loadcell	4 Unit	
Platform Feature	Static Painted Steel Platform	
Power Supply	110V/220V	
Balance	Stable Legs	



TR4

Optional > Waterproof IP 67
> Universal Connector
RS 232

Practical and Easy installation

SMT Quality Motherboard System

5 profile durable steel cage

Cable Channel Protection Feature

CE Certified for Industrial Use

Extreme Load And Impact Resistant System



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Memory+ Feature
- Digital warning system
- Digital warning system
- Static electricity-proof
- ABS Plastic screen housing
- Insect shielded
- Counting mode with sampling
- LED Screen automatic back light
- 360° lateral rotation, 90° vertical rotation
- Universal connector RS 232 (optional)
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)



HUMAN SCALE

Every Moment of Life

Internal rechargeable battery (200 hours)
 360° lateral rotation, 90° vertical rotation
 Adjustable high and low alarm limits
 LED Screen automatic back light
 Waterproof IP 67 (optional)
 Universal connector RS 232
 ABS Plastic screen housing
 Intelligent Sleep Mode
 Digital warning system
 Static electricity-proof
 weight hold feature
 Large LCD screen
 24-bit processor
 Insect shielded



Universal connector RS 232

Large LCD Screen

Auto-off Feature

TR

Optional > Waterproof IP 67

TR & TR4

Capacity & Readability	200kg / 50gr	300kg / 100gr
Size	45x45 cm	
Operating Temperature	-10 C 45 C	
Loadcell	4 Unit	
Platform Feature	Static Painted Steel Platform	
Power Supply	110V/220V	
Balance	Adjustable Legs	



TR4

Optional > Waterproof IP 67
 > Universal Connector
 RS 232

CE Certificate

Easy Holding Handle

Electrostatic Painted

SMT Quality Motherboard System

Cable Channel Protection Feature

Extreme Load And Impact Resistant System



24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Universal connector RS 232 (optional)
 Memory+ Feature
 Adjustable high and low alarm limits
 Internal rechargeable battery (200 hours)
 Digital warning system
 Insect shielded
 Static electricity-proof
 Counting mode with sampling
 360° lateral rotation, 90° vertical rotation
 ABS Plastic screen housing
 LED Screen automatic back light



MEASURE HEIGHT SCALE TR

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

Static electricity-proof

Optional > Waterproof IP 67



TR
&
TR4

Capacity & Readability	200Kg / 20gr	300Kg / 50gr
Size	35x40	
Operating Temperature	-10 C 45 C	
Loadcell	One Unit	
Platform Feature	Static Painted Steel Platform	
Power Supply	110V/220V	
Balance	Adjustable Legs	
Extra Feature	Meter System 60CM-210CM	

MEASURE HEIGHT SCALE TR4

Counting Mode with Sampling

Insect Shielded

Optional > Waterproof IP 67
> Universal connector RS 232

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



HOSPITAL RAMP SCALE T-HR

- Internal rechargeable battery (200 hours)
- 360° lateral rotation, 90° vertical rotation
- Adjustable high and low alarm limits
- LED Screen automatic back light
- Waterproof IP 67 (optional)
- Universal connector RS 232
- ABS Plastic screen housing
- Intelligent Sleep Mode
- Digital warning system
- Static electricity-proof
- weight hold feature
- Large LCD screen
- 24-bit processor
- Insect shielded

TR
Optional
> Waterproof IP 67



24-Bit Processor

Portable System

Internal rechargeable battery (200 Hours)

**TR
&
TR4**

Capacity & Readability	600Kg / 200gr	1000Kg / 500gr
Size	8x25x200cm	
Operating Temperature	-10 C 45 C	
Loadcell	4 Unit	
Platform Feature	Static Painted Steel Platform	
Power Supply	110V/220V	



TR4

Optional > Waterproof IP 67
> Universal connector
RS 232



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

TURKTER MEASURE HEIGHT

Size	35x40
Platform Feature	Static Painted Steel Platform
Balance	Adjustable Legs
Extra Feature	Meter System 60cm-210cm



FAT RATE METER BATHROOM SCALE

Automatic User Recognition

Calorie Calculation

Lcd Screen
150 Kg Capacity
1x3V Lithium Battery
BMI (Body Mass Index)
Calorie Calculation
12 ; Different Person Registration Feature
Automatic User Recognition



NEEDED SQUARE BATHROOM SCALE

Manuel Balance

130 Kg Capacity

Metal Body

Rubber Platform
Static Painted White Platform



ROUND DISPLAY BATHROOM SCALE

136 Kg Capacity
1 Kg Readability
Chrome Coated Metal Body
Easy Readable Widescreen
Sensitive Mechanism
Overload Protection



VETERINARY SCALE HB300

TR



Easy Carrying Feature

Universal connector RS 232

Optional > Waterproof IP 67

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

TR & TR4

Capacity & Readability	300Kg / 10gr		
Size	50x70cm	55x80cm	80x90cm
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Static Painted Steel Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		



Optional > Waterproof IP 67
> Universal connector
RS 232

TR4

Static Electricity-proof

Large LCD Screen

Digital Warning System

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

Every Moment of Life

VETERINARY SCALE

P-HB-300 TR



Static Electricity-proof

Universal Connector RS 232

Optional > Waterproof IP 67

24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Universal connector RS 232
 Adjustable high and low alarm limits
 weight hold feature
 Internal rechargeable battery (200 hours)
 Digital warning system
 Insect shielded
 Static electricity-proof
 Intelligent Sleep Mode
 360° lateral rotation, 90° vertical rotation
 ABS Plastic screen housing
 LED Screen automatic back light

TR
&
TR4

Capacity & Readability	300Kg / 10gr		
Size	50x70 cm	55x80 cm	80x90 cm
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Full Stainless Platform		
Power Supply	110V/220V		
Balance	Adjustable Legs		

TR4

24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Universal connector RS 232 (optional)
 Memory+ Feature
 Adjustable high and low alarm limits
 Internal rechargeable battery (200 hours)
 Digital warning system
 Insect shielded
 Static electricity-proof
 Counting mode with sampling
 360° lateral rotation, 90° vertical rotation
 ABS Plastic screen housing
 LED Screen automatic back light



Insect Shielded

Internal Rechargeable Battery (200 Hours)

24-Bit Processor

Optional > Waterproof IP 67
 > Universal connector RS 232



Every Moment of Life

ÇAĞIN TR

FULL STAINLESS PLATFORM SCALE

Static Electricity-proof

Weight Hold Feature

Large LCD Screen

Optional > Waterproof IP 67



Capacity & Readability — SIZE

600Kg / 200gr 100x100cm

1500Kg / 500gr 100x100cm

2000Kg / 500gr 100x100cm

1500Kg / 500gr 100x120cm

600Kg / 200gr 120x120cm

1500Kg / 500gr 120x120cm

2000Kg / 500gr 120x120cm

3000Kg / 1000gr 120x120cm

1500Kg / 500gr 120x150cm

2000Kg / 500gr 120x150cm

3000Kg / 1000gr 120x150cm

1500Kg / 500gr 150x150cm

2000Kg / 500gr 150x150cm

3000Kg / 1000gr 150x150cm

6000Kg / 2000gr 150x150cm



TR & TR4

Operating Temperature -10 C 45 C

Loadcell 4 Unit

Platform Feature Full Stainless Platform

Power Supply 110V/220V

Balance Adjustable Legs



Static Electricity-proof

Weight Hold Feature

Large LCD Screen

Optional > Waterproof IP 67
> Universal connector
RS 232

ÇAĞIN TR4

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

TWIN PALETTE SCALE

FULL STAINLESS

120x12x10 cm

Full Stainless Platform

Portable System

- Internal rechargeable battery (200 hours)
- 360° lateral rotation, 90° vertical rotation
- Adjustable high and low alarm limits
- LED Screen automatic back light
- Waterproof IP 67 (optional)
- Universal connector RS 232
- ABS Plastic screen housing
- Intelligent Sleep Mode
- Digital warning system
- Static electricity-proof
- weight hold feature
- Large LCD screen
- 24-bit processor
- Insect shielded



TR

Optional > Waterproof IP 67



TR & TR4

Capacity & Readability	600kg / 200gr	1500Kg / 500gr	3000Kg / 1000gr
Size	120X12X10 cm		
Operating Temperature	-10 C 45 C		
Loadcell	4 Unit		
Platform Feature	Full Stainless Platform		
Power Supply	110V/220V		



TR4

Optional > Waterproof IP 67
> Universal connector
RS 232

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen

Universal connector RS 232 (optional)
Memory+ Feature

Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system
Insect shielded

Static electricity-proof
Counting mode with sampling

360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



PORTABLE U SCALE

FULL STAINLESS

TR

Optional > Waterproof IP 67

- Internal rechargeable battery (200 hours)
- 360° lateral rotation, 90° vertical rotation
- Adjustable high and low alarm limits
- LED Screen automatic back light
- Waterproof IP 67 (optional)
- Universal connector RS 232
- ABS Plastic screen housing
- Intelligent Sleep Mode
- Digital warning system
- Static electricity-proof
- weight hold feature
- Large LCD screen
- 24-bit processor
- Insect shielded



Carrying Handle



120x12x10 cm

Full Stainless Platform

Portable System

Adjustable Legs

TR & TR4

Capacity & Readability	3000kg / 1000gr
Size	120X12X10 cm
Operating Temperature	-10 C 45 C
Loadcell	4 Unit
Platform Feature	Full Stainless Platform
Power Supply	110V/220V
Balance	Adjustable Legs



TR4

Optional
> Waterproof IP 67
> Universal connector
RS 232

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



WHEELED U SHAPED SCALES

FULL STAINLESS

Internal rechargeable battery (200 hours)
 360° lateral rotation, 90° vertical rotation
 Adjustable high and low alarm limits
 LED Screen automatic back light
 Waterproof IP 67 (optional)
 Universal connector RS 232
 ABS Plastic screen housing
 Intelligent Sleep Mode
 Digital warning system
 Static electricity-proof
 weight hold feature
 Large LCD screen
 24-bit processor
 Insect shielded

TR

Optional > Waterproof IP 67



HOLD Feature

Full Stainless Platform

Portable System

Universal connector RS 232



TR & TR4

Capacity & Readability	1500Kg / 500gr	3000Kg / 1000gr
Size	10x80x120 cm	10x110x120 cm
Operating Temperature	-10 C 45 C	
Loadcell	4 Unit	
Platform Feature	Full Stainless Platform	
Power Supply	110V/220V	
Balance	Adjustable Legs	



TR4

Optional > Waterproof IP 67
 > Universal connector
 RS 232



Rubber Wheel



24-bit processor
Waterproof IP 67 (optional)

Large LCD screen

Memory+ Feature

Universal connector RS 232 (optional)

Adjustable high and low alarm limits

Internal rechargeable battery (200 hours)

Digital warning system

Insect shielded

Static electricity-proof

Counting mode with sampling

360° lateral rotation, 90° vertical rotation

ABS Plastic screen housing

LED Screen automatic back light

FARM SCALE MODULAR

TR

Insect Shielded

Static Electricity-proof

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light




TR4

Digital Warning System

Internal rechargeable battery (200 hours)

24-bit Processor

Optional > Waterproof IP 67
> Universal connector RS 232

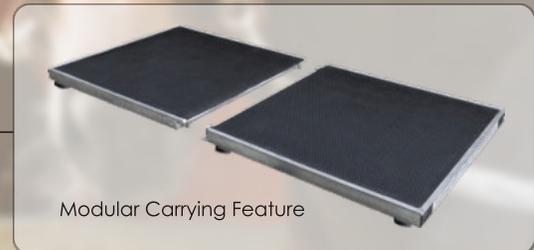

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



TR & TR4

Capacity & Readability	1500Kg / 500gr
Size	100 x 200 cm
Operating Temperature	-10 C 45 C
Loadcell	6 Unit
Platform Feature	Static Painted Steel Platform
Power Supply	110V/220V
Balance	Adjustable Legs




ANIMAL SCALE

TR

Optional > Waterproof IP 67

- Internal rechargeable battery (200 hours)
- 360° lateral rotation, 90° vertical rotation
- Adjustable high and low alarm limits
- LED Screen automatic back light
- Waterproof IP 67 (optional)
- Universal connector RS 232
- ABS Plastic screen housing
- Intelligent Sleep Mode
- Digital warning system
- Static electricity-proof weight hold feature
- Large LCD screen
- 24-bit processor
- Insect shielded

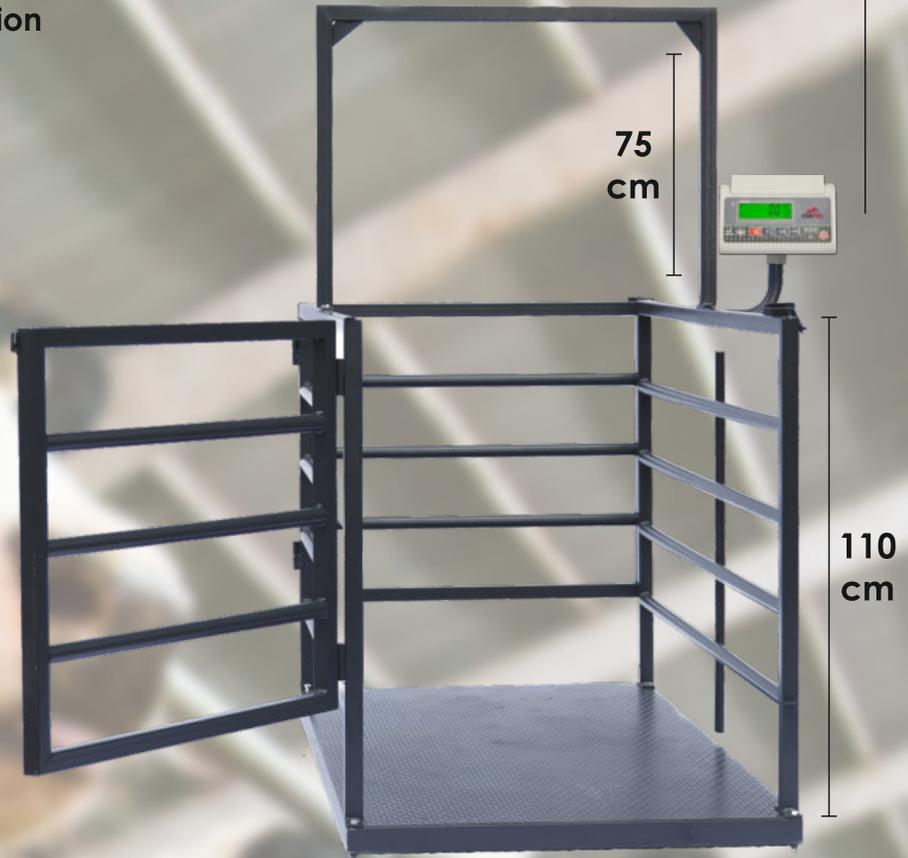

Easy Setup

Special Lock System

Shielded cables feature

5 levels resistant steel cage

Dual doors (enter and exit)

CE Certified for Industrial Use

Extreme Load And Impact Resistant System

TR
&
TR4

Capacity & Readability	1500kg / 500gr	2000kg / 500gr	3000kg / 1000gr	4000kg / 2000gr
Size	100x200 cm			
Operating Temperature	-10 C 45 C			
Loadcell	4 Unit			
Platform Feature	Static Painted Steel Platform			
Power Supply	110V/220V			
Balance	Adjustable Legs			



TR4

Optional > Waterproof IP 67
> Universal connector RS 232

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



SHEEP SCALE

Internal rechargeable battery (200 hours)
 360° lateral rotation, 90° vertical rotation
 Adjustable high and low alarm limits
 LED Screen automatic back light
 Waterproof IP 67 (optional)
 Universal connector RS 232
 ABS Plastic screen housing
 Intelligent Sleep Mode
 Digital warning system
 Static electricity-proof
 weight hold feature
 Large LCD screen
 24-bit processor
 Insect shielded



TR

Optional > Waterproof IP 67

TR & TR4

Capacity & Readability	300kg / 100gr	500kg / 200gr
Size	80x100 cm	
Operating Temperature	-10 C 45 C	
Loadcell	4 Unit	
Platform Feature	Static Painted Steel Platform	
Power Supply	110V/220V	
Balance	Adjustable Legs	



- Special Lock System
- Double Door (Entry-Exit)
- Practical and Easy installation
- SMT Quality Motherboard System
- 5 profile durable steel cage
- Cable Channel Protection Feature
- CE Certified for Industrial Use
- Extreme Load And Impact Resistant System



TR4

Optional > Waterproof IP 67
 > Universal connector
 RS 232

24-bit processor
 Waterproof IP 67 (optional)
 Large LCD screen
 Universal connector RS 232 (optional)
 Memory+ Feature
 Adjustable high and low alarm limits
 Internal rechargeable battery (200 hours)
 Digital warning system
 Insect shielded
 Static electricity-proof
 Counting mode with sampling
 360° lateral rotation, 90° vertical rotation
 ABS Plastic screen housing
 LED Screen automatic back light



STAINLESS BUTCHER HOOK TR SCALE

- Static Electricity-Proof
- Weight hold feature
- Large LCD Screen

Optional > Waterproof IP 67
> Static Painted

24-bit processor
Large LCD screen
Insect shielded
Weight hold feature
Waterproof IP 67 (optional)
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)
Digital warning system
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



TR
&
TR4

Capacity & Readability	600Kg /100gr
Size & Height	80x90 cm & 185cm
Operating Temperature	-10 C 45 C
Loadcell	4 Unit
Platform Feature	Stainless Platform
Power Supply	110V/220V
Balance	Adjustable Legs

STAINLESS BUTCHER HOOK TR4 SCALE

- Internal rechargeable battery (200 hours)
- M+ Feature
- Counting mode with sampling

Optional > Waterproof IP 67
> Universal connector RS 232
> Static Painted

24-bit processor
Large LCD screen
Memory+ Feature
Static electricity-proof
Insect shielded
Digital warning system
Waterproof IP 67 (optional)
Universal connector RS 232 (optional)
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



TR

MONORAIL SCALE

TR4

Static electricity-proof

Universal Connector RS 232

Optional > Waterproof IP 67

Internal Rechargeable Battery (200 Hours)


Insect Shielded

Optional > Waterproof IP 67
> Universal connector RS 232



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

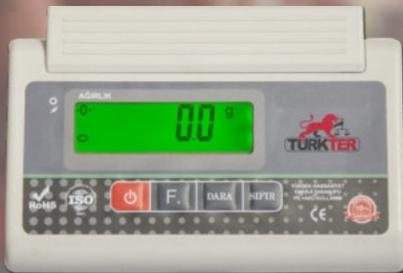

TR & TR4

Capacity & Readability	300Kg /100gr	600Kg/200gr	1500Kg/500gr
Operating Temperature	-10 C 45 C		
Loadcell	2 Unit		
Platform Feature	Stainless		
Power Supply	110V/220V		



Every Moment of Life

 **RoHS** **CE**

ISO9001
CERTIFIED

- 500 Kg Weighing Capacity
- 50 Gr Weighing Accuracy
- 1/30000 high resolution
- Front and Rear Display
- Auto zero tracking
- Power saving design with automatic sleep function
- Weighing feature in different units Kg, Gr, lb
- 6 digits LCD display with green backlight
- Stainless hook
- Simple counting function
- Low voltage alarm / overload alarm
- Static electricity-proof
- Operating Temperature
- 220V or rechargeable battery
- ABS Plastic Body
- Tare Feature
- Easy Carrying
- Reset



500 Kg Weighing Capacity

Front and Rear Display

Easy Carrying

Static Electricity-proof

Battery Operated Feature

Tare Reset

HOOK MEAT SCALE



www.turkter.com - +90 444 6 031 - info@turkter.com

TR

AXLE SCALE

TR4

Internal rechargeable battery (200 hours)

Static Electricity-proof

Optional > Waterproof IP 67



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

Digital Warning System

Internal rechargeable battery (200 hours)

24-bit Processor

Optional > Waterproof IP 67
> Universal connector RS 232



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232 (optional)
- Memory+ Feature
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



TR & TR4

Capacity & Readability

20.000Kg / 10.000gr

Size

80x300cm

Operating Temperature

-10 C 45 C

Loadcell

8 Unit

Platform Feature

Static Painted Steel Platform

Power Supply

110V/220V

PALLET TRUCK SCALES TR

- Internal rechargeable battery (200 hours)
- 360° lateral rotation, 90° vertical rotation
- Adjustable high and low alarm limits
- LED Screen automatic back light
- Waterproof IP 67 (optional)
- Universal connector RS 232
- ABS Plastic screen housing
- Intelligent Sleep Mode
- Digital warning system
- Static electricity-proof
- weight hold feature
- Large LCD screen
- 24-bit processor
- Insect shielded

- Optional**
- > Internal Labels Printer Feature
 - > Waterproof IP 67



TR
&
TR4

Capacity & Readability	2000kg / 500gr	2500kg / 500gr
Size	120x115x65 cm	
Operating Temperature	-10 C 45 C	
Loadcell	4 Unit	
Platform Feature	Static Painted Steel Platform	
Power Supply	110V/220V	
Move	Polyurethane Silent Wheels	

- Internal Absorbent Against Shocs
- Calculation Ability
- Visor Protection
- 8mm Steel Top Chasis
- Internal Labels Printing (optional)
- Easy to Repair Pump
- 10mm Steel bottom Chasis
- Moisture, fume and Waterproof Junction box
- 5mm Steel Case



TR4

- Optional**
- > Waterproof IP 67
 - > Universal Connector RS 232
 - > Label Print Feature



- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Memory+ Feature
- Digital warning system
- Digital warning system
- Universal connector RS 232 (optional)
- Adjustable high and low alarm limits
- Internal rechargeable battery (200 hours)
- Static electricity-proof
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- LED Screen automatic back light
- ABS Plastic screen housing
- Insect shielded



Every Moment of Life

SSH LAB SCALE BELL GLASS

Unit Weight Mode

Large LCD Screen

Bell Glass

AC-DC Transformation

Count Mode

Moisture <%85

Rechargeable 6V Battery 1.3A



- Operating Temperature -10 C 45 C
- 110V / 220V
- Stainless Case Diameter 11.5cm
- Abs Plastic Case
- Width 270mm
- Depth 300mm
- Height 300mm

200gr / 0.001gr

300gr / 0.001gr

JEWELER SENSITIVE SCALE SSH

Unit Weight Mode

Large LCD Screen

Rechargeable 6V Battery 1.3A

AC-DC Transformation

Count Mode

Moisture <%85

3 kg / 0.01 gr

5 kg / 0.01 gr

6 kg / 0.1 gr



- Operating Temperature -10 C 45 C
- Water Gauge
- Stainless Case Diameter 15x15cm
- Abs Plastic Case
- Width 180mm
- Depth 210mm
- Height 80mm

WORKBENCH SCALE TR

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Universal connector RS 232
- Adjustable high and low alarm limits
- weight hold feature
- Internal rechargeable battery (200 hours)
- Digital warning system
- Insect shielded
- Static electricity-proof
- Intelligent Sleep Mode
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light

ABS Plastic screen housing

Universal connector RS 232

Adjustable High And Low Alarm Limits



Optional > Waterproof IP 67



•The Table is not included.

TR
&
TR4

Capacity & Readability	30Kg /1gr
Size	30x30
Operating Temperature	-10 C 45 C
Loadcell	One Unit
Platform Feature	Stainless Platform
Power Supply	110V/220V
Balance	Adjustable

- 24-bit processor
- Waterproof IP 67 (optional)
- Large LCD screen
- Memory+ Feature
- Insect shielded
- Static electricity-proof
- Adjustable high and low alarm limits
- Digital warning system
- Universal connector RS 232 (optional)
- Internal rechargeable battery (200 hours)
- Counting mode with sampling
- 360° lateral rotation, 90° vertical rotation
- ABS Plastic screen housing
- LED Screen automatic back light



WORKBENCH SCALE TR4

Static electricity-proof

M+ Feature

Optional > Waterproof IP 67
> Universal connector RS 232

OTM WEIGHING SCALE

Tare Feature

1/30000 High Resolution

Stainless Case

Water Gauge

- Stainless Case
- 315mm X 280mm Case Size
- Weighing feature in different units Kg, Gr, lb
- Front and Rear Display
- 1/30000 High resolution
- 9 button simple operation
- Auto Tare
- Auto Reset
- Simple counting function
- Low voltage alarm / overload alarm
- Power saving with automatic sleep function
- Static electricity-proof
- Operating Temperature -10 °C ~ + 40 °C
- 220V or rechargeable battery



30 kg/ 1 gr

15 kg/ 0.5 gr

6 kg/ 0.2 gr

3 kg/ 0.1 gr

OTM COUNTING SCALE

Weighing feature in different units Kg, Gr, lb

Tare Feature

Water Gauge

- Stainless Case
- 315mm X 280mm Case Size
- Weighing feature in different units Kg, Gr, lb
- Front and Rear Display
- 1/30000 High resolution
- 6 digital LCD display with green backlight
- 9 button simple operation
- Auto Tare
- Auto Reset
- Simple counting function
- Low voltage alarm / overload alarm
- Power saving with automatic sleep function
- Static electricity-proof



30 kg/ 1 gr

15 kg/ 0.5 gr

6 kg/ 0.2 gr

3 kg/ 0.1 gr

Every Moment of Life

TURKTER7 WATERPROOF

Internal rechargeable battery (60 Hours)

Waterproof IP 67

LED Screen

Stainless Case

Tare Feature

Insect Shielded



Capacity & Readability	30Kg /1gr	30Kg/5gr
Size	19 x 23.5 cm	
Operating Temperature	-10 C 45 C	
Loadcell	1 Unit	
Platform Feature	Full Stainless Platform	
Power Supply	110V/220V	
Balance	Adjustable Legs	

TURK-TER03 PRICE CALCULATION SCALE

RoHS

ISO9001
CERTIFIED

CE

Front and Rear 6 Digit LCD Indicator

Kg/gr/lb Weighing in Different Units

Tare Feature

Auto Tare

Simple Counting Function

Auto Sleep Function

Static Electricity-proof



Capacity & Readability	30Kg /10gr
Size	315mm X 280mm
Operating Temperature	-10 C 45 C
Loadcell	1 Unit
Platform Feature	ABS Plastic Case - Stainless Platform
Power Supply	110V/220V
Balance	Adjustable Legs

TURKTER42

STAINLESS CASE



5 Kg / 1 gr Weighing Capacity

Stainless Case

Milk Measurement Feature

LCD Screen

Battery Operated Feature

Tare Reset

- Auto Sleep Mode
- Auto Calibration
- Battery Index
- Auto Backlight
- Kg/Gr/Lb/Oz Transformation

✓RoHS CE

ISO9001
CERTIFIED

TURK-TER07

PLASTIC CASE



1,5 Liter Bowl

5 Kg / 1 gr Weighing Capacity

Plastic Transparent Case

LCD Screen

Battery Operated Feature

Tare Reset

Large Keys

- Auto Sleep Mode
- Auto Calibration
- Battery Index
- Auto Backlight
- Kg/Gr/Lb/Oz Transformation

✓RoHS ISO9001 CERTIFIED CE

Every Moment of Life

GÖKTÜRK

STAINLESS PLATFORM

Internal rechargeable battery (200 hours)
Adjustable high and low alarm limits)
Universal connector RS 232
ABS Plastic screen housing
Intelligent Sleep Mode
Digital warning system
Static electricity-proof
weight hold feature
Large LCD screen
24-bit processor
Insect shielded



27 x 22 cm Stainless Platform

Insect Shielded

LCD Screen

Tare Feature

Internal Rechargeable Battery (200 Hours)

•3kg / 0.5gr
•6kg / 1gr
•15kg / 2gr
•30kg / 5gr
•60kg / 10gr

TCS-B6

Ayarlanabilir Gösterge

Weight Hold Feature

Large LCD Screen

Optional > Waterproof IP 67

Lcd screen
Internal rechargeable battery
Backlight
180 degree active head
Price calculation feature
ABS Plastic screen housing
Ip 67 Feature (optional)
Stainless Platform

30kg / 10 gr



Stainless Platform



Every Moment of Life

AYYILDIZ

STAINLESS PLATFORM

Lcd screen
Internal rechargeable battery
Backlight
Price calculation feature
ABS Plastic screen housing
Waterproof IP 67 Feature (optional)
Stainless Platform

27 x 22 cm Stainless Platform

Insect Shielded

LCD Screen

Tare Feature

Internal Rechargeable Battery (200 Hours)

Optional > Waterproof IP 67



- 15kg / 5gr
- 30kg / 10gr
- 60kg / 20gr



CEPTER-I

2Kg / 0.1gr

16cm x 12,5cm x 3,8cm

Stainless Platform

Tare Feature

- Slim design
- LCD Screen
- Bright blue backlight
- High precision sensors
- Stainless Platform
- Tare feature
- Track Counting Feature
- Hold function
- 60-second automatic shut-off function



CEPTER-II

500gr / 0.05gr

3 * AA Battery / AC Adapter

LCD Screen

- LCD Screen
- Bright blue backlight
- High precision sensors
- Stainless Platform
- Tare Feature
- Hold function



3.8
cm

16 cm



10
cm

12 cm

TURKTER VACUUM MACHINE TR/VCM



Automatic Control Processor

Powerful Vacuum Pump

Stainless Surface

Easy Cleaning

- Safe electrical design and Robust mechanical construction.
- Stainless steel on internal and external surfaces material used.
- With transparent top cover, Monitoring of vacuumed products.
- Easy operation and microprocessor with automatic control.

MODEL

	TR/VCM 260	TR/VCM 350	TR/VCM 450
Machine Size(mm)	480x330x320	560x425x460	560x520x460
Partition Measures(mm)	385x280x90(50)	450x370x220(170)	460x450x220(170)
Sealing Dimensions(mm)	260x8	350x8	430x8
Pump Capacity m3/h	10	20	20
Gross Weight(kg)	44	73	80
Net Weight(kg)	36	62	68
Package Sizes(mm)	570x440x460	670x550x600	670x620x600

TR



LCD WEIGHING INDICATOR

Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode

360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light
24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)

LCD WEIGHING INDICATOR

Large LCD Screen
Bluetooth Connect (Optional)
Universal connector RS 232
A/D Converter 20 Bit CPU
Operating Temperature -10 ~ +40 Degree
Humidity %85

Battery Life 80 Hours
Lower-Upper Limiting, Hi-Ok-Lo
ABS Plastic Case



TR-571

HSCN



LCD WEIGHING INDICATOR

Digital warning system
Insect shielded
Static electricity-proof
Intelligent Sleep Mode
360° lateral rotation, 90° vertical rotation

ABS Plastic screen housing
Universal connector RS 232
LED Screen automatic back light
24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232
Adjustable high and low alarm limits
weight hold feature
Internal rechargeable battery (200 hours)

LCD WEIGHING INDICATOR

24-bit processor
Waterproof IP 67 (optional)
Large LCD screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)

Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light



TR4

TR4



LED WEIGHING INDICATOR

24-bit processor
Waterproof IP 67 (optional)
Large LED screen
Universal connector RS 232 (optional)
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)

Digital warning system
Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light

LCD COUNTING INDICATOR

24-bit processor
Waterproof IP 67 (optional)
3 Unit LCD screen
Memory+ Feature
Adjustable high and low alarm limits
Internal rechargeable battery (200 hours)
Digital warning system

Insect shielded
Static electricity-proof
Counting mode with sampling
360° lateral rotation, 90° vertical rotation
ABS Plastic screen housing
LED Screen automatic back light
Counting Feature



TR4

NECK APPARATUS



BA - 1
ACTIVE



BA - 2
IRON



BA - 3
STABLE



BA - 4
ACTIVE

ADAPTER



ADP - 1

JOHNSON BOX



BJ - 2
STAINLESS

LEGS



A - 1
ACTIVE



A - 2
STABLE

YÜK HÜCRELERİ/LOADCELLS

TRL - 1



TRL - 2



TRL - 3



TRL - S



TRL - 30




TRL - 4



TRL - T



TRL - K

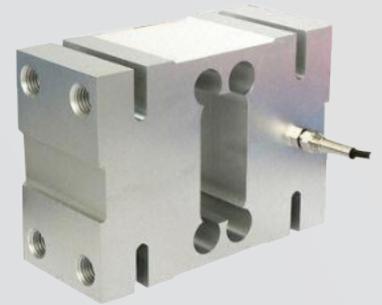

LABELS AND PAPERS



LOGOS AND COLORS PAINTED LABEL




CASH REGISTER PAPER

GENERAL SIZE

56X12 MT
56X16 MT
56X20 MT
56X30 MT
80X40 MT
80X80 MT



ONE COLOR PAINTED LABEL

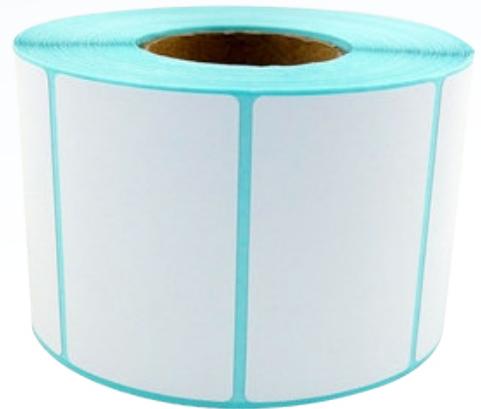


BARCODE LABEL

DESIRED SIZE, COLOR AND DESIGN WE PRODUCE YOUR OWN LABEL OR PAPER.

Every Moment of Life

CERTIFICATES

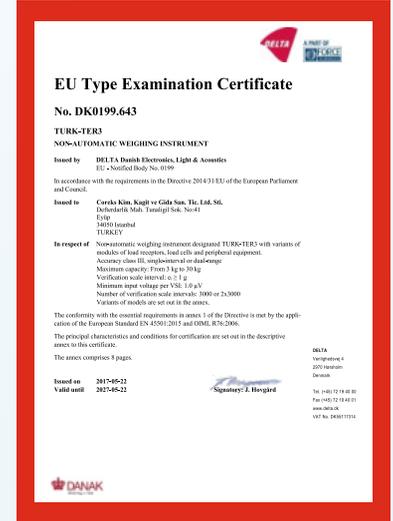



www.turkter.com - info@turkter.com



[turkter.terazi](https://www.facebook.com/turkter.terazi)



[turkter](https://www.instagram.com/turkter)



[+90 539 922 1453](https://wa.me/905399221453)



[turkter](https://www.linkedin.com/company/turkter)

+90 444 6 031

